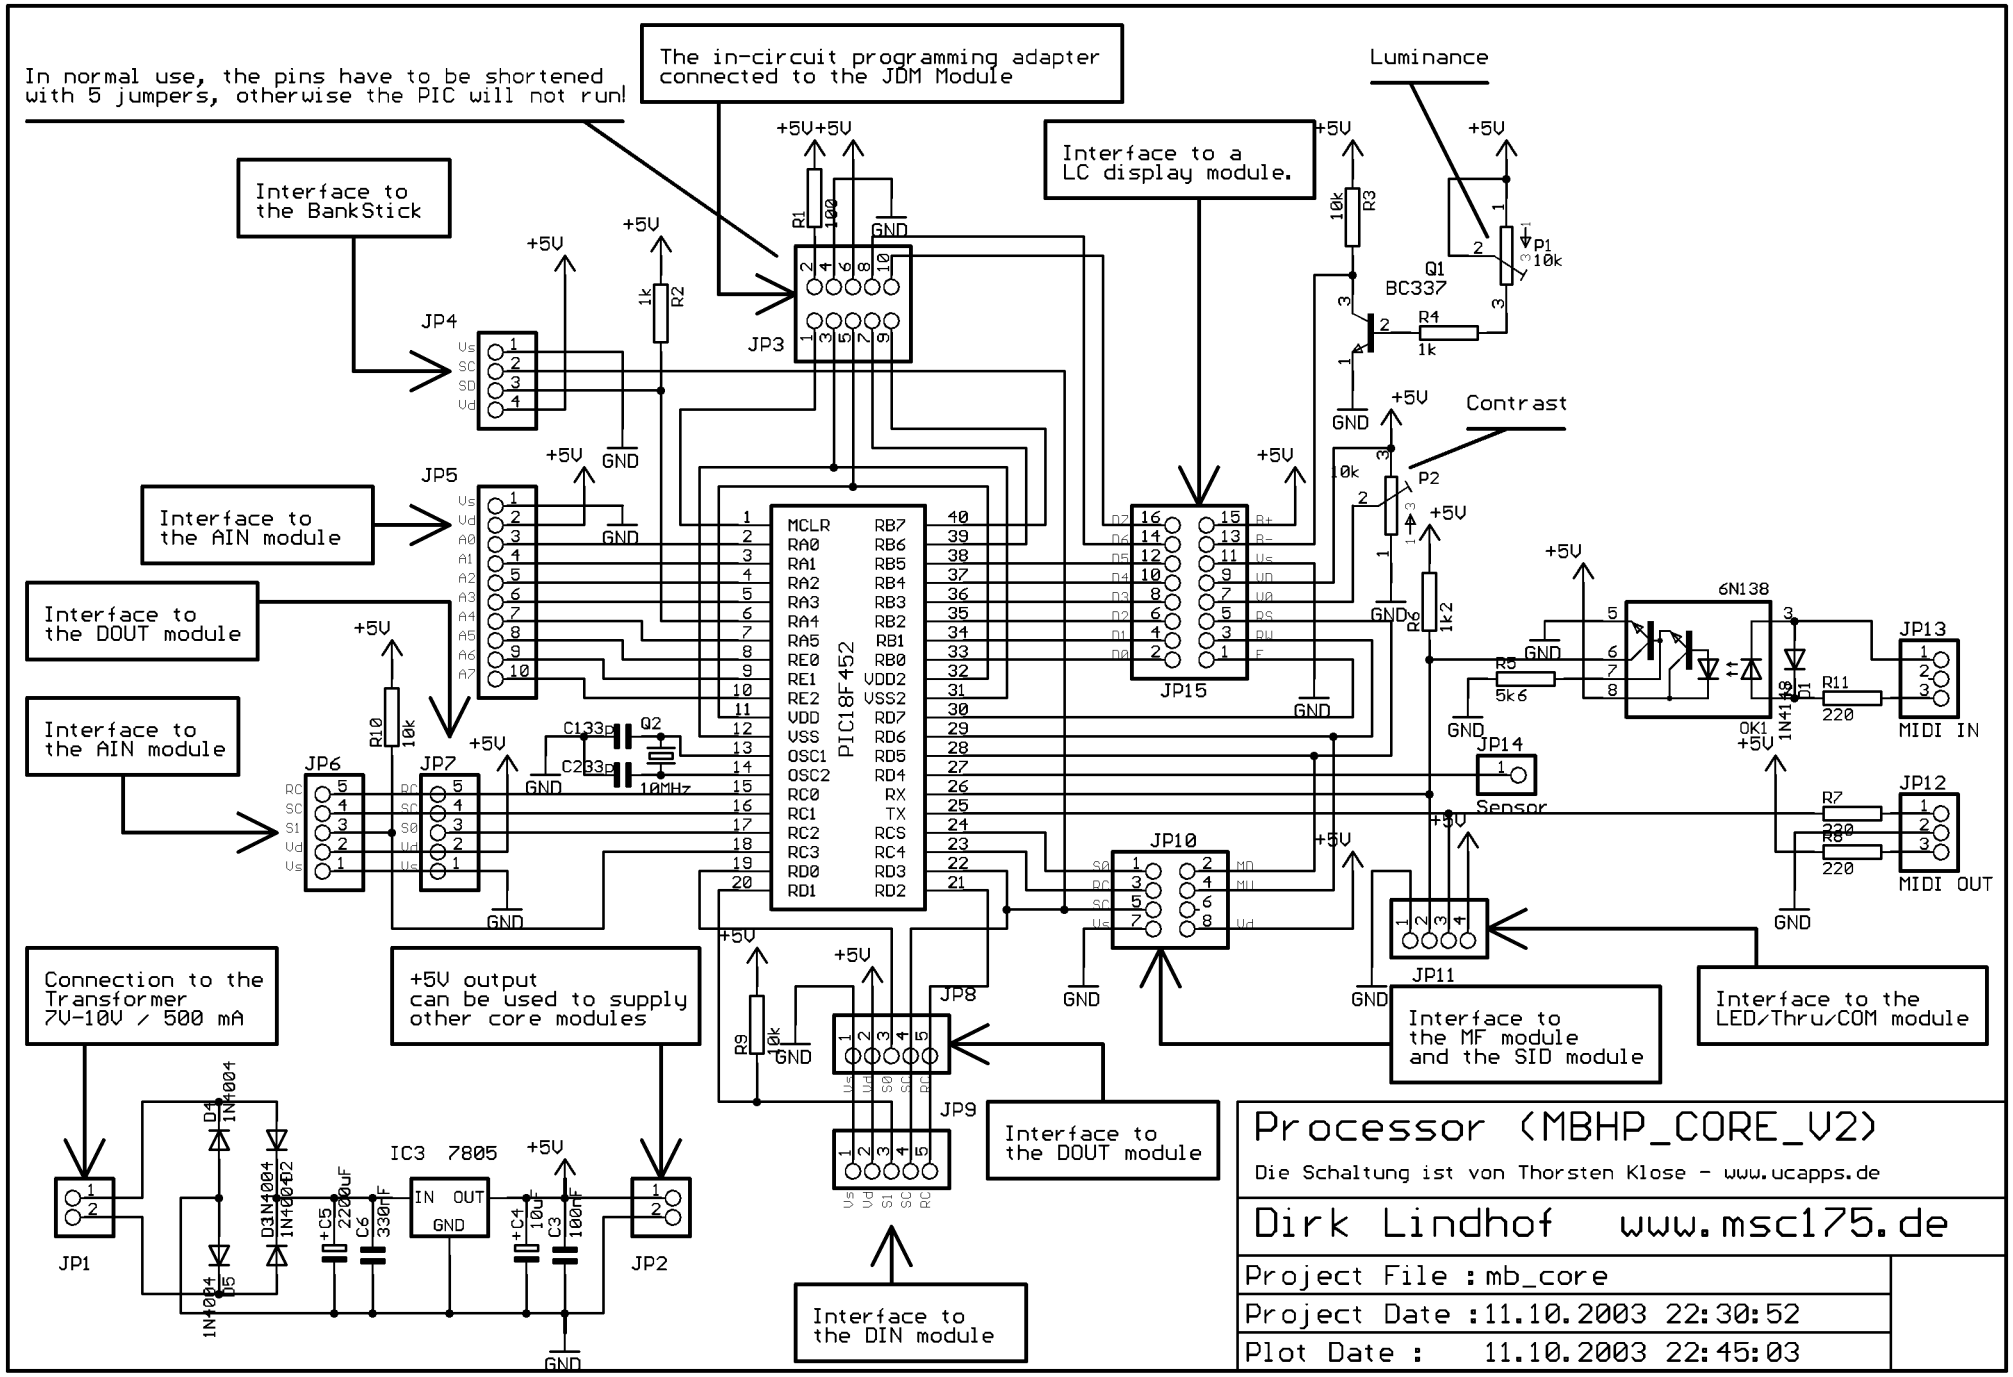
In normal use, the pins have to be shortened with 5 jumpers, otherwise the PIC will not run!
The in-circuit programming adapter connected to the JDM Module
Interface to the BankStick
Interface to the AIN module
Interface to the DOUT module
Interface to the AIN module
Interface to a LC display module.
Luminance
Contrast
Sensor
Connection to the Transformer 7V-10V / 500 mA
+5V output can be used to supply other core modules
Interface to the MF module and the SID module
Interface to the LED/Thru/COM module
Interface to the DOUT module
Interface to the DIN module
PIC18F452
IC3 7805
6N138
MIDI IN
MIDI OUT
Processor (MBHP_CORE_V2)
Die Schaltung ist von Thorsten Klose - www.ucapps.de
Dirk Lindhof www.msc175.de
Project File : mb_core
Project Date : 11.10.2003 22:30:52
Plot Date : 11.10.2003 22:45:03